


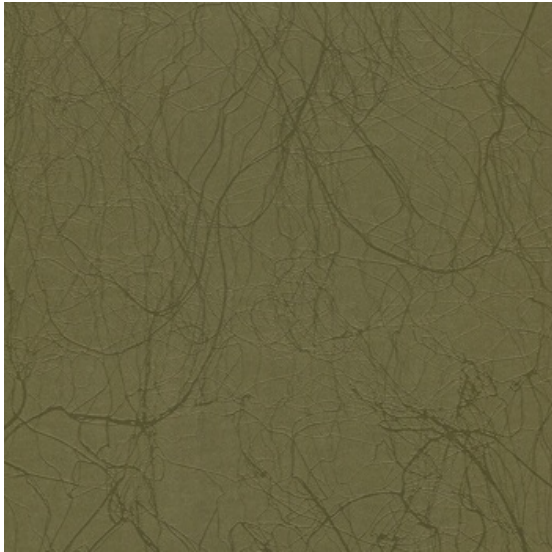

Repeats Not Shown to Scale.

Sketch Patina 1011095

Meets or exceeds all ACT® Standards

- High Performance Vinyl
- Ink Cleanable
- Denim Dye Cleanable
- Bleach Cleanable
- PFAS Free



\*ACT® Registered Certification Marks

Fabric Specifications

|                  |                                               |
|------------------|-----------------------------------------------|
| Face             | 100% Vinyl                                    |
| Backing          | 65% Polyester,<br>35% Cotton                  |
| Finish/Treatment | Forbid SRT™                                   |
| Bleach Cleanable | Yes<br>Ratio: 90% Water / 10% Bleach Solution |
| Weight           | 30.0 oz. per linear yd                        |
| Thickness        | 1.00 mm                                       |
| Width            | 54"                                           |
| Roll Size        | 30 yards                                      |
| Directional      | Yes                                           |
| Railroaded       | No                                            |

Additional Attributes

|                           |     |
|---------------------------|-----|
| Ink Cleanable             | Yes |
| Denim Dye Cleanable       | Yes |
| PFAS Free                 | Yes |
| Forbid SRT                | Yes |
| 16P Phthalate Free        | Yes |
| Antibacterial             | Yes |
| Antimicrobial             | Yes |
| BPA Free                  | Yes |
| Free of Conflict Minerals | Yes |
| Formaldehyde Free         | Yes |
| Free of Heavy Metals      | Yes |
| Lead Free                 | Yes |
| Mildew Resistant          | Yes |
| Sulfide Stain Resistant   | Yes |

Performance Characteristics

|                                                  |                                     |
|--------------------------------------------------|-------------------------------------|
| Abrasion Resistance <small>ASTM D4157</small>    | 100,000 double rubs*                |
| Tensile Strength <small>ASTM D751</small>        | Warp: 80.0 lbs.<br>Fill: 120.0 lbs. |
| Tear Strength <small>ASTM D751</small>           | Warp: 10.0 lbs.<br>Fill: 15.0 lbs.  |
| Colorfastness to Crocking <small>AATCC 8</small> | Dry: 4.0<br>Wet: 4.0                |
| UV Resistance <small>ASTM G154</small>           | 300 hours                           |
| Adhesion <small>CFFA-3</small>                   | Warp: 4.0 lbs.<br>Fill: 4.0 lbs.    |
| Cold Crack <small>CFFA-6</small>                 | -10° F                              |

Flammability\*\*

|                 |         |
|-----------------|---------|
| CAL TB 117-2013 | Passes  |
| NFPA 260        | Class 1 |
| UFAC            | Class 1 |
| FMVSS 302       | Passes  |

Although we try hard to make sure colors on our site are accurate, actual colors may vary. Please order samples prior to making a purchase.

Final determination of the suitability of this product for an application rests with the user.

Proposition 65 Warning: Yes

\* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

\*\* This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

|                                                 |     |
|-------------------------------------------------|-----|
| TRIS Free                                       | Yes |
| Low VOC                                         | Yes |
| <b>Recommended Cleaning</b>                     |     |
| Please refer to Detailed Cleaning Instructions. |     |

---

Toll Free **1.800.841.8111**

Visit us at **BurchFabrics.com**