
Burch

Technical Details

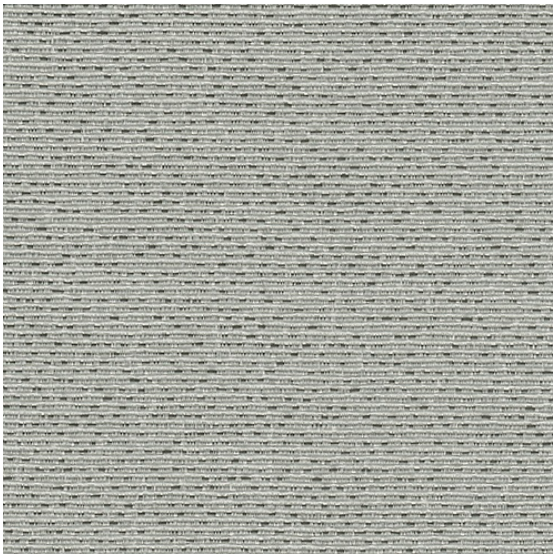

Repeats Not Shown to Scale.

CENTENNIAL STONE

1013287

Meets or exceeds all ACT® Standards

Acoustic Approved

Vertical Surface Fabric
PFAS Free

*ACT® Registered Certification Marks

Fabric Specifications

Content	100% Post Consumer Recycled Polyester
Backing	Light Acrylic
Weight	8.4 oz. per linear yd
Width	66"
Roll Size	60 yards
Ends/Picks	Ends: 145 per inch Picks: 25 per inch
Directional	Yes
Railroaded	No
Country of Origin	USA

Additional Attributes

PFAS Free	Yes

Recommended Cleaning

Please refer to Detailed Cleaning Instructions.

Performance Characteristics

Tensile Strength ASTM D5034	Warp: 197.0 lbs. Fill: 81.0 lbs.
Tear Strength ASTM D2261-96	Warp: 28.0 lbs. Fill: 36.0 lbs.
Colorfastness to Crocking AATCC 8	Dry: 4.0 Wet: 3.0
Colorfastness to Light AATCC 16	Hours: 40.0 Class: 4.0
Acoustic Testing ASTM C 423	NRC Rating: 1.05

Flammability**

CAL TB 117-2013	Passes
NFPA 260	Class 1
UFAC	Class 1
ASTM E-84	Class A or 1

Although we try hard to make sure colors on our site are accurate, actual colors may vary. Please order samples prior to making a purchase.

Final determination of the suitability of this product for an application rests with the user.

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.